

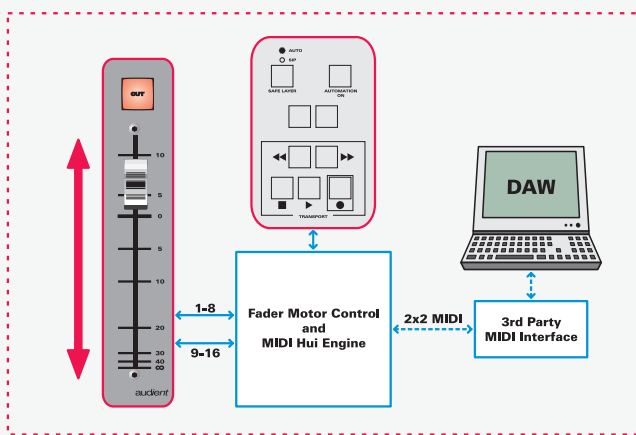




\* Optional Fader & Mute Automation - 100mm ALPS Faders - DAW Controlled



Optional Microphone Preamplifier  
\*Note Polarity Reverse only with Microphone Preamplifier option


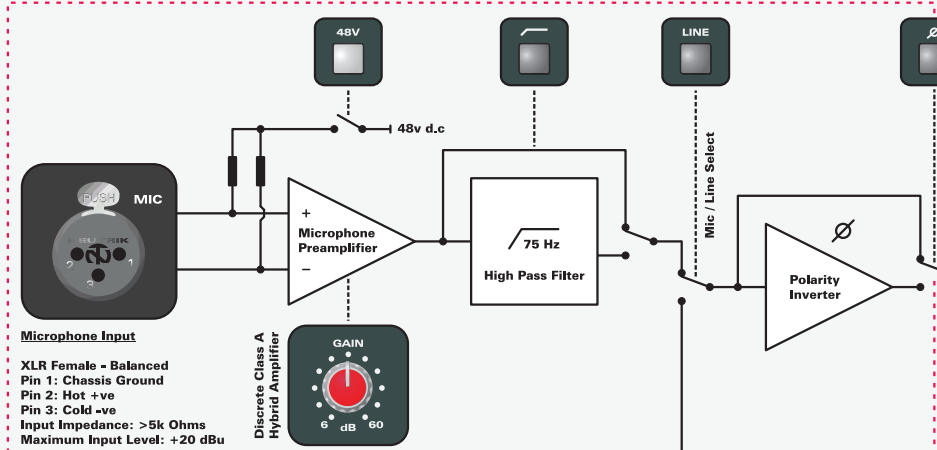


**Line & DAW Inputs**  
XLR Female - Balanced  
Pin 1: Chassis Ground  
Pin 2: Hot +ve  
Pin 3: Cold -ve  
Input Impedance: >10k Ohms  
Maximum Input Level: +27 dBu

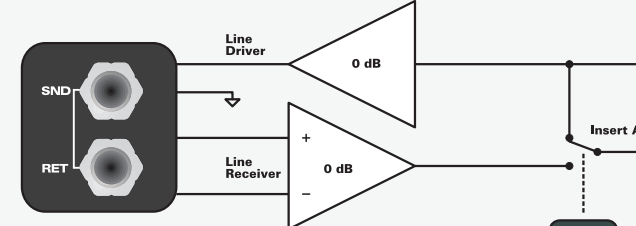

**Insert Send**  
1/4" TRS Jack - Impedance Balanced  
Tip: Hot +ve  
Ring: Cold -ve  
Shield: Chassis Ground  
Output Impedance: 150 Ohms  
Maximum Output Level: +21 dBu

**Insert Return**  
1/4" TRS Jack - Balanced  
Tip: Hot +ve  
Ring: Cold -ve  
Shield: Chassis Ground  
Input Impedance: >10k Ohms  
Maximum Input Level: +21 dBu

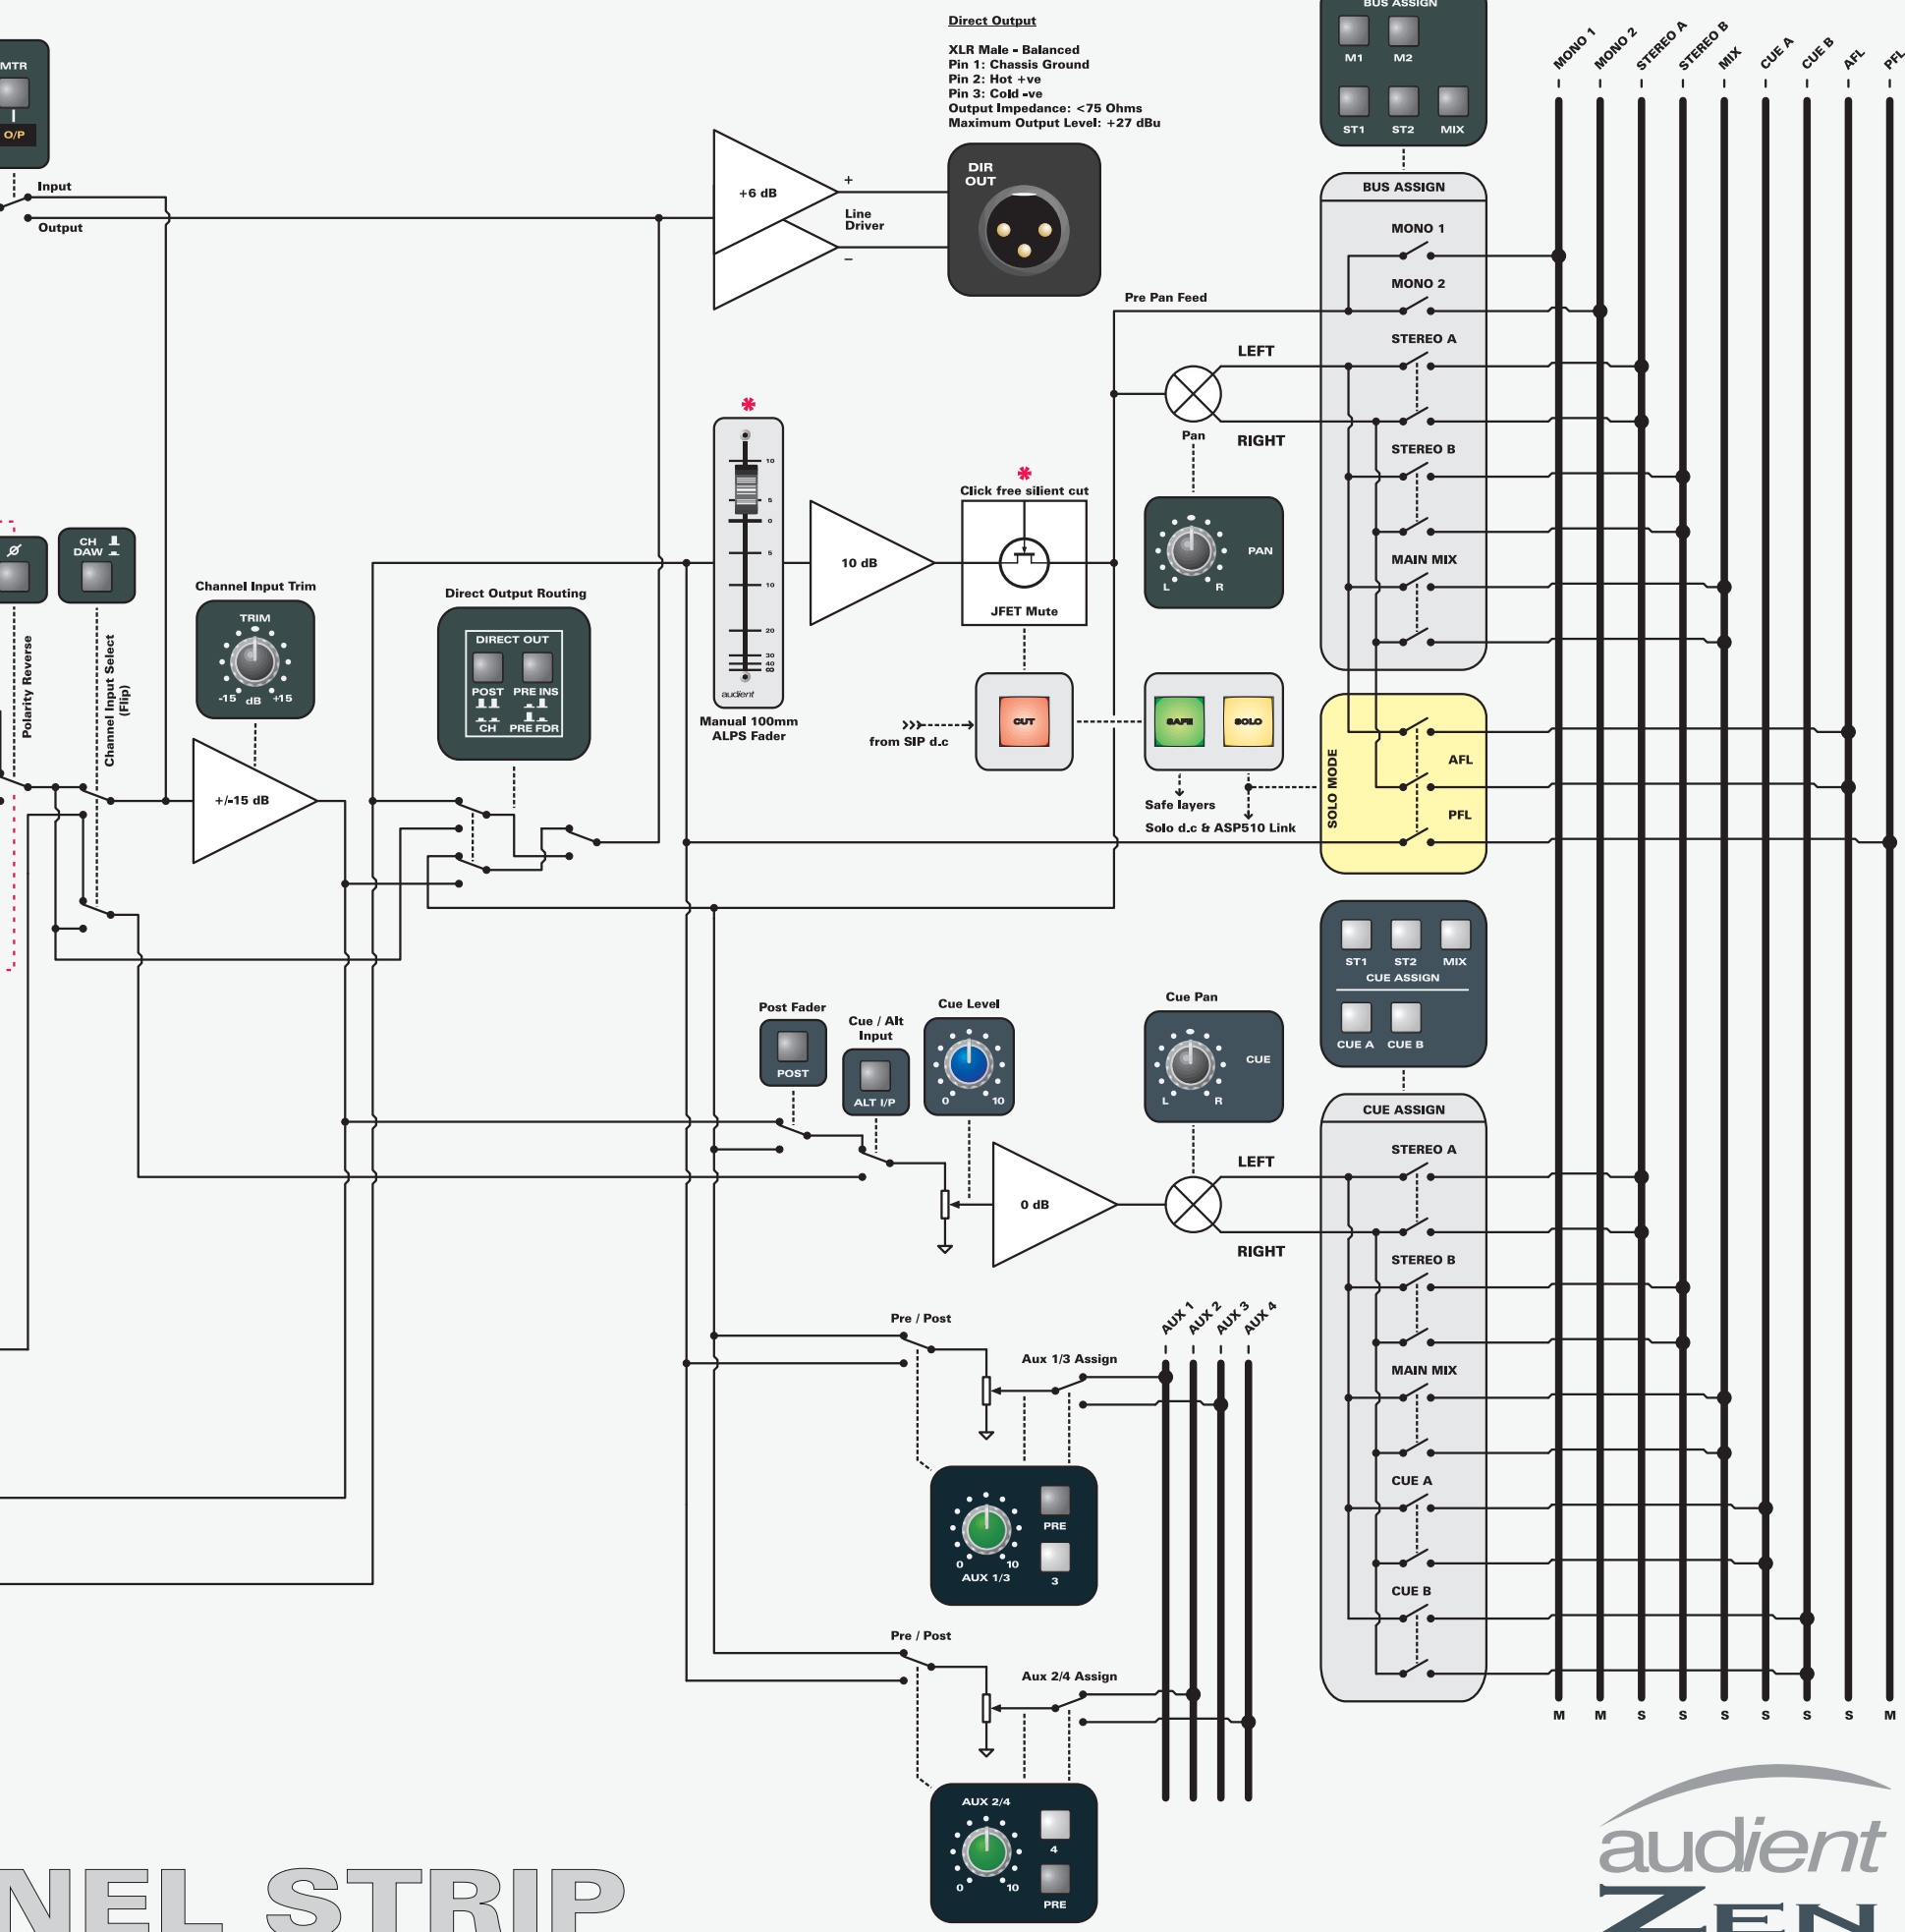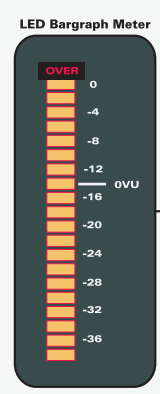

# CHANNEL STRIP

